




Multistage drainage pumps for clean water made of technopolymer material used for pumping liquid from wells, tanks and reservoirs, pressurization of domestic systems, irrigation of gardens and vegetable gardens. The single-phase version includes a built-in capacitor, a thermal protector and it can be equipped with a float switch. Suitable to be installed with the Hidrotank flow controller.



White water

Construction features

Pump body technopolymer



Impeller, diffusers Noryl®

Shell, motor cover, base support Noryl®

Mechanical seal

double seal with oil barrier: silicon carbide on pump side, sealing ring on motor side

Motor shaft stainless steel AISI 303

Max submergence 5 m

Liquid temperature 0 - 35 °C

Cable H07 RN8F, 10 m

G float switch

Motor



3~ 400V - 50Hz

2 poles induction motor


1~ 230V - 50Hz
(with thermal protection)

Insulation class F

Protection degree IPX8

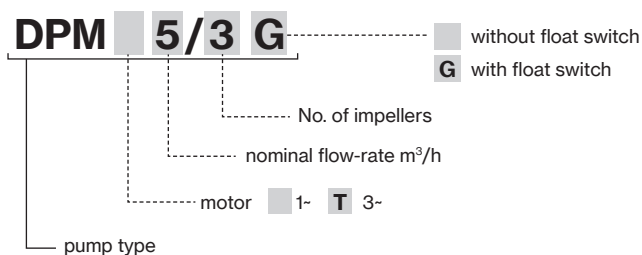


DPM

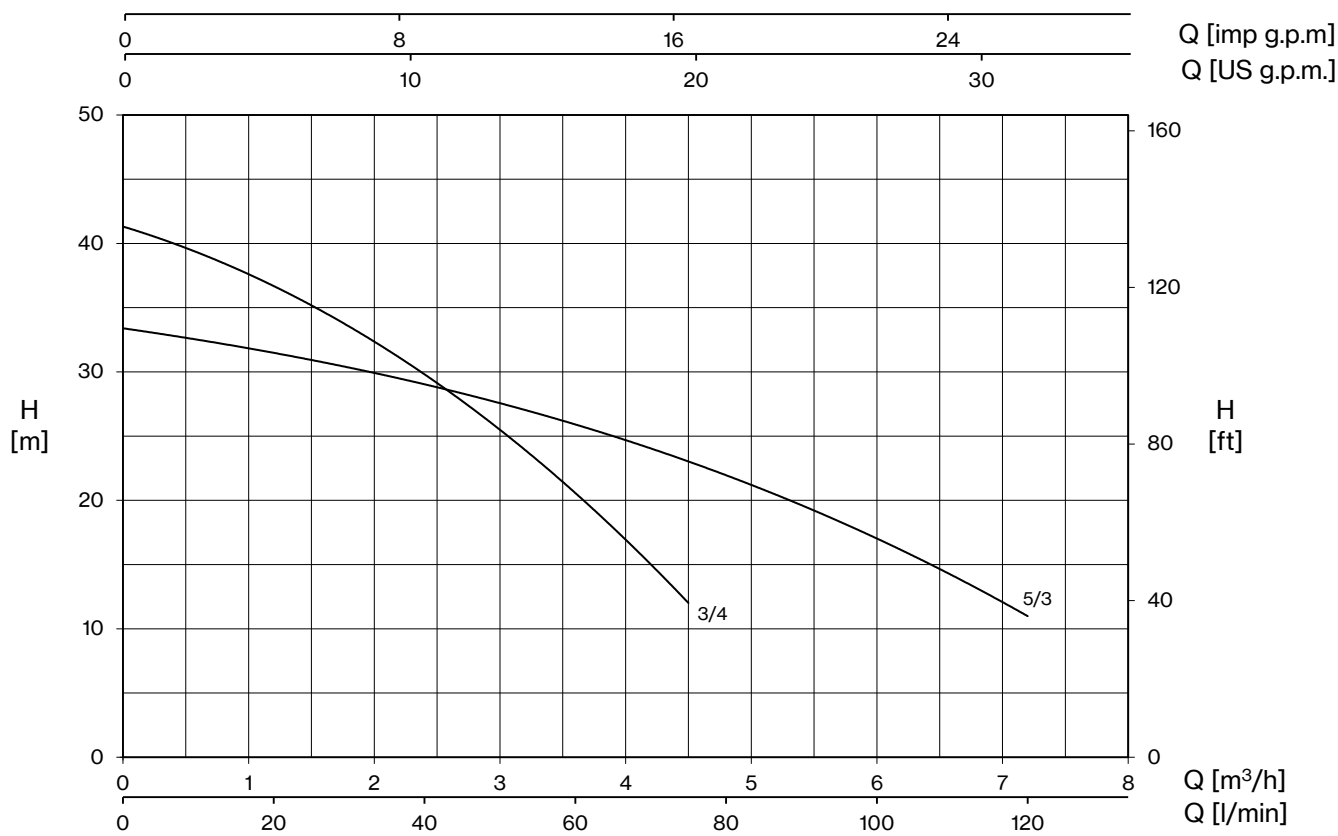

TYPE - 50 Hz		P1	CURRENT		Q (m³/h - l/min)								
1~	3~		1~ 230V	3~ 400V	0	0,6	1,2	1,8	2,4	3,6	4,5	6	7,2
					0	10	20	30	40	60	75	100	120
			kW		A		H (m)						
DPM 5/3 (G)	DPMT 5/3	0,9	3,9	1,7	33,4	32,5	31,5	30,3	29,0	26,0	23,0	17,0	11,0
DPM 3/4 (G)	DPMT 3/4	0,8	3,4	1,6	41,3	39,3	36,7	33,5	29,8	20,6	12,0		

mt: minimum working level

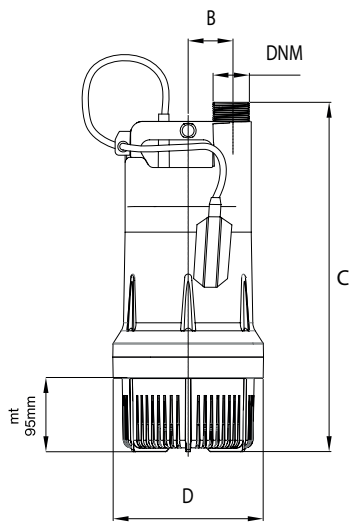

TYPE		DIMENSIONS (mm)							
1~	3~	B	C	D	DNM	I	L	M	
DPM 5/3 (G)	DPMT 5/3	56	454	196	1" ½	264	203	482	10
DPM 3/4 (G)	DPMT 3/4	56	454	196		264	203	482	10,5

