

POOL2-I

Swimming Pool




The pump includes a variable speed drive for greater comfort and minimized energy costs, in addition to the following features: 5 configurable daily filtration cycles, filter cleaning program, pool lighting control, function for water surface cleaning, 2 outputs for activating saline chlorinator and pump status, protection for over voltage, against dry running and pipe breakage.

Pre-filter sieve


Self-vented wall support

Construction features	
Pump body, seal housing, diffuser	polypropylene
Motor bracket	aluminum
Impeller	Noryl®
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C
Pre-filter cover	polycarbonate
Opening key for pre-filter lid	polypropylene

Motor	
2 Poles induction motor	1~ 230V-50Hz
Insulation class	F
Protection degree	IP55
Integral system for pool control	with variable speed drive included



POOL2-I

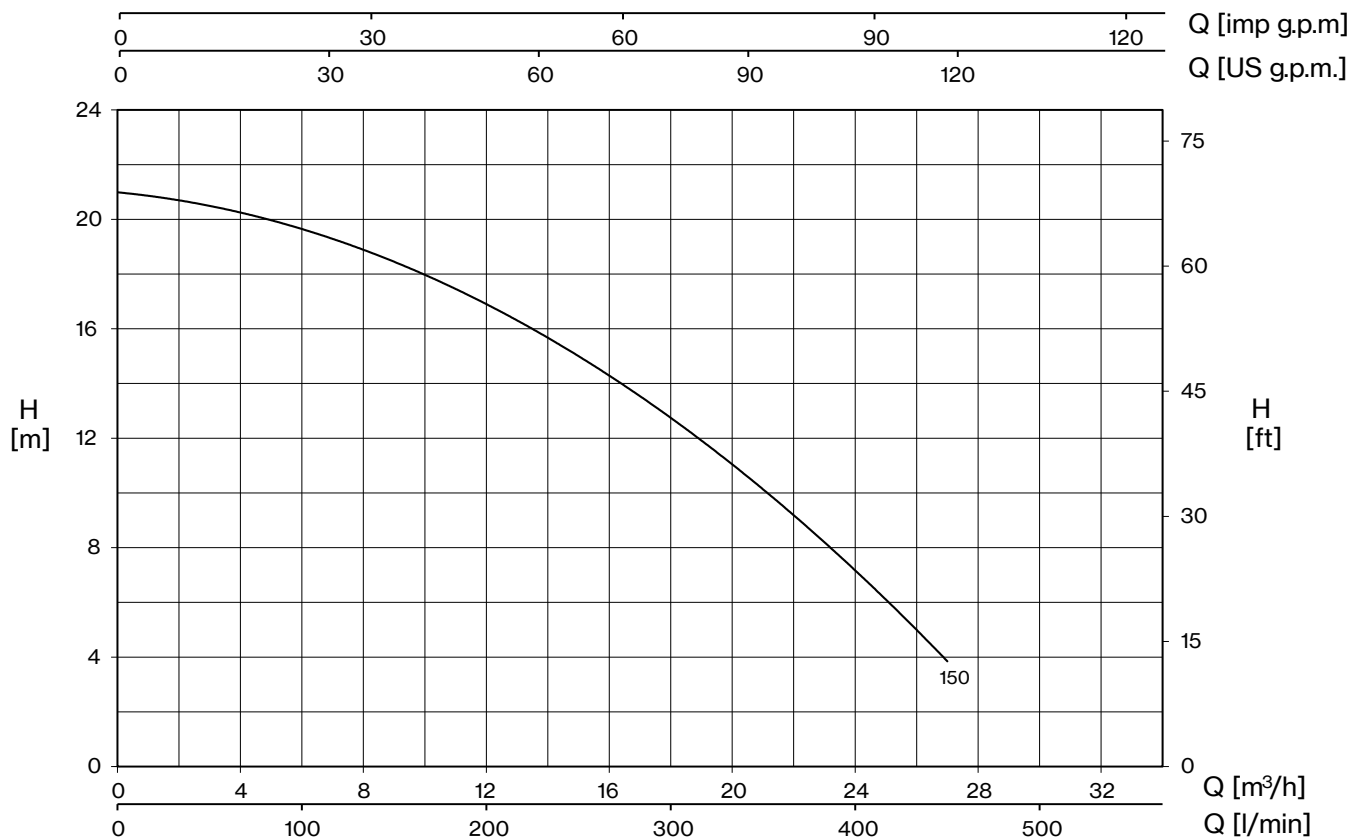

TYPE	P2		μF	AMPERE	H (m)								DNA	DNM
				1~	4	6	8	10	12	14	16	18		
1~	HP	kW		230 V	Q (m³/h)									
POOL2-I 150M	1,5	1,1	30	7,3	27	25	23	21	19	17	13	10	2" Ø 63 PVC	